


HƯỚNG DẪN CẤU HÌNH MODEM TPLINK 8951

Thực hiện theo hướng dẫn như hình



Bước 1: Chọn Advanced Setup -> Enabled Firewall (nếu chưa chọn)

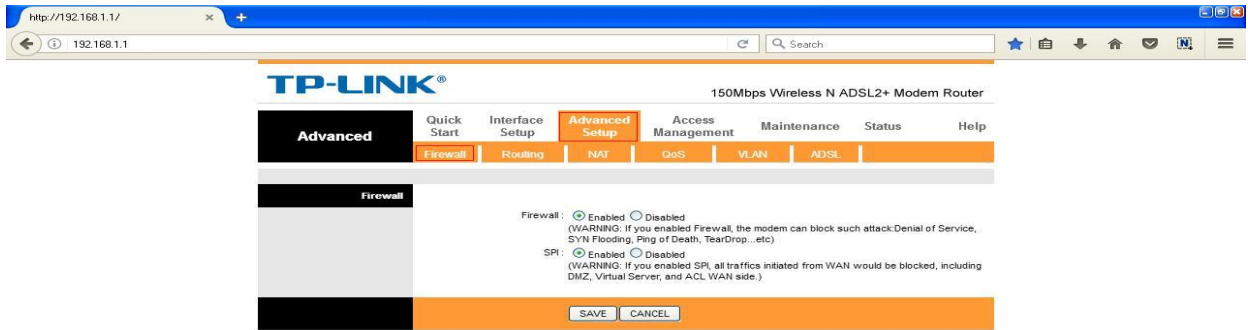

http://192.168.1.1/

192.168.1.1

Search

Bước 2: chọn Status - kiểm tra phần DNS Server nếu trả về DNS SPT (221.133...) là OK, nếu không vô được thì hướng dẫn tắt modem vài lần mở lại. Nếu trả về DNS khác thì reset modem cấu hình lại

150Mbps Wireless N ADSL2+ Modem Router

Back Interface Setup Advanced Setup Access Management Maintenance **Status** Help

Status Device Info System Log Statistics

Device Information

Firmware Version : Flash:2M_Memory:16M_3.0.1 Build 130620 Rel.05215
MAC Address : 30:b5:c2:71:9e:72
CPU Usage : 8%
Memory Usage : 61%
Active Session : [Detail](#)
ARP : [Detail](#)

LAN

IP Address : 192.168.1.1
Subnet Mask : 255.255.255.0
DHCP Server : Enabled

Wireless

Current Connected Wireless Clients number is 0

ID	MAC
----	-----

WAN

PVC	VP/VC	IP Address	Subnet	GateWay	DNS Server	Encapsulation	Status
PVC0	0/33	116.118.81.151	255.255.255.255	221.133.0.92	221.133.1.2	PPPoE	Up

ADSL

ADSL Firmware Version : FwVer:3.20.17.0_TC3087 HwVer:T14.F7_11.2
Line State : Showtime
Modulation : G.DMT
Annex Mode : ANNEX_A

	Downstream	Upstream	
SNR Margin :	29.0	16.0	db
Line Attenuation :	0.0	3.5	db
Data Rate :	8128	1024	kbps
Max Rate :	13696	1324	kbps
POWER :	9.5	12.0	dbm
CRC :	0	0	

start Mozilla Firefox HTTP Test 1 - Paint Mozilla Firefox Downloads 1 - Paint 16:51

http://192.168.1.1/ 192.168.1.1

Bước 3: Chọn Interface Setup, phần PPPoE/PPPoA
username (user k/h), password: nhập password (nhớ phải đổi trên Radmin)
IPv4 Address để Dynamic - xong Save lại

150Mbps Wireless N ADSL2+ Modem Router

Interface | Quick Start | **Interface Setup** | Advanced Setup | Access Management | Maintenance | Status | Help

Internet | LAN | **Wireless**

SCR: 0 cells/second
MBS: 0 cells

IPv4/IPv6

IP Version: IPv4 IPv4/IPv6 IPv6

Encapsulation

ISP: Dynamic IP Address
 Static IP Address
 PPPoE/PPPoA
 Bridge Mode

PPPoE/PPPoA

Service name:
Username: s_nq1 **user k/h**
Password: **** **nhập password**
Encapsulation: PPPoE LLC
Bridge Interface: Activated Deactivated

Connection Setting

Connection: Always On (Recommended)
 Connect On-Demand (Close if idle for 0 minutes)
 Connect Manually
TCP MSS Option: TCP MSS(default:1400) 1400 bytes

IP Common Options

Default Route: Yes No

IPv4 Address

Get IP Address: Static Dynamic
Static IP Address: 0.0.0.0
IP Subnet Mask: 0.0.0.0
Gateway: 0.0.0.0
TCP MTU Option: TCP MTU(default:1480) 1480 bytes
NAT: Enable
Dynamic Route: RIP2-B Direction: Both
Multicast: IGMP v2

Dual Stack Lite

Enable: Enable Disable

SAVE

start Mozilla Firefox HTTP Test 2 - Paint Mozilla Firefox Downloads 1 - Paint 16:52

http://192.168.1.1/ x +
192.168.1.1 Search

Bước 4: Đổi tên wifi (SSID) - đổi pass Wifi xong Save lại

150Mbps Wireless N ADSL2+ Modem Router

Interface | Quick Start | **Interface Setup** | Advanced Setup | Access Management | Maintenance | Status | Help

Internet | LAN | **Wireless**

Channel Bandwidth: 20/40 MHz
Extension Channel: below the control channel
Guard Interval: AUTO
MCS: AUTO

Multiple SSIDs Settings

SSID Index: 1
Broadcast SSID: Yes No
Use WPS: Yes No

WPS Settings

WPS state: Configured
WPS mode: PIN code PBC
Start WPS
WPS progress: Idle
Reset to OOB
SSID: ONGDAM
Authentication Type: WPA2-PSK

WPA2-PSK

Encryption: TKIP/AES
Pre-Shared Key: 54052479 (8-63 ASCII characters or 64 hexadecimal characters)

WDS Settings


WDS Mode: On Off
WDS Encryption Type: TKIP
WDS Key: (8-63 ASCII characters or 64 hexadecimal characters)

Mac Address #1: 00:00:00:00:00:00
Mac Address #2: 00:00:00:00:00:00
Mac Address #3: 00:00:00:00:00:00
Mac Address #4: 00:00:00:00:00:00


Wireless MAC Address Filter

Active: Activated Deactivated
Action: Allow Association of the follow Wireless LAN station(s) association.
Mac Address #1: 00:00:00:00:00:00
Mac Address #2: 00:00:00:00:00:00
Mac Address #3: 00:00:00:00:00:00
Mac Address #4: 00:00:00:00:00:00
Mac Address #5: 00:00:00:00:00:00

start Mozilla Firefox HTTP Test 3 - Paint Mozilla Firefox Downloads 1 - Paint 16:53



Bước 5: Chọn Maintenance -> Time Zone -> chọn PC's Clock (gỡ trên máy tính) -> Save

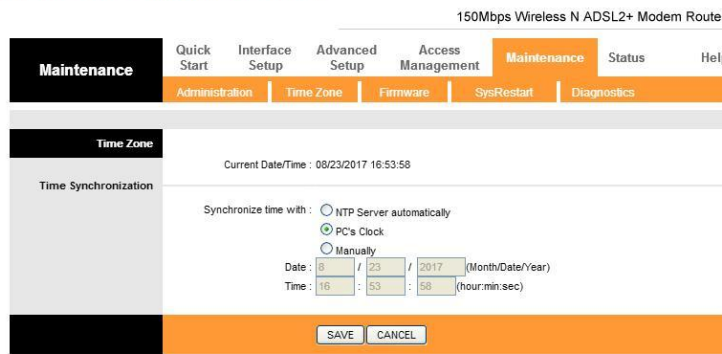

Hướng dẫn cần lnhx xong về lại Status kiểm tra DNS Server xem có trả về DNS Server (221.133...) không, nếu có thì kêu kiểm tra lại kết nối internet.
Done

